

Serie 23000 TECH



STANDARD




OPTIONAL




- * Solo per versione 36/3
- * For 36/3 version only
- * Seulement pour version 36/3
- * Nur für 36/3 Ausführung

Momento statico massimo al perno torretta Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle Max. statisches ubmoment am krausaulenbolzen	Coppia di rotazione Slew torque Moment de rotation Drehmoment	Uscita laterale stabilizzatori Outriggers lateral extension Sortie latérale de bequilles Seitliche lange der Abstützungen	Larghezza stabilizzatori Outriggers width Largeur des bequilles Gesamtbreite der Abstützung	Pressione Pressure Pression Druck	Capacità serbatoio olio Oil tank capacity Capacité du réservoir de l'huile Öl tank inhalt
daN*m (lb*ft)	daN*m (lb*ft)	mm (ft)	mm (ft)	bar (psi)	L (us gal)
22000 (159156)	490 (3544)	1700+1700 (5' 7" + 5' 7")	5600 (18' 4")	250 (3555)	120 (31)

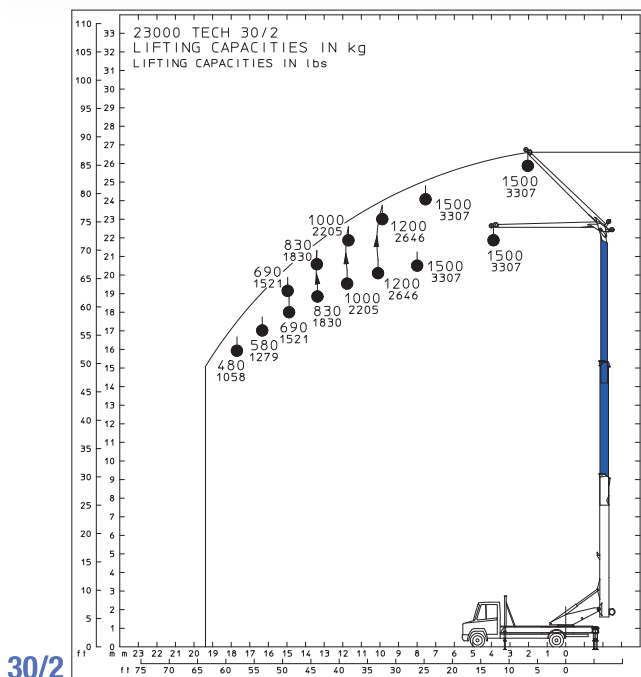

30/2

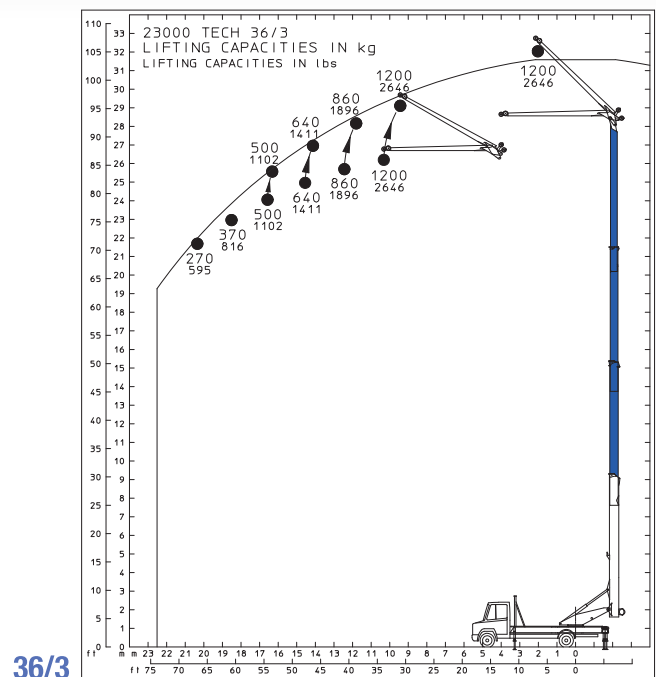

36/3

	30/2	36/3	
Sbraccio idraulico / Hydraulic boom length / Longueur du bras hydraulique / Hydraulic reichweite	m (ft)	19.38 (63' 7")	22.50 (73' 10")
Peso (senza olio e montaggio) / Weight (without oil and fitting) / Poids (sans huile et montage) / Gewicht (ohne Öl und ohne)	Kg (lbs)	4470 (9855)	4753 (10479)